


Operations:

1. Connect the charger system to a wall receptacle strongly. The battery charger must only be plugged into an earthed socket-outlet.
2. Connect your the alligator clips to battery terminals (red clip → positive terminal; black clip → negative terminal)
3. Turn on the power switch which is located on the rear panel then the red LED lits and bi-color LED will confirm the charger's stage. And the LCD (or digital meter) will confirm the charger's stage & battery level (or O/P voltage)

Charging Curve & LED Indications:

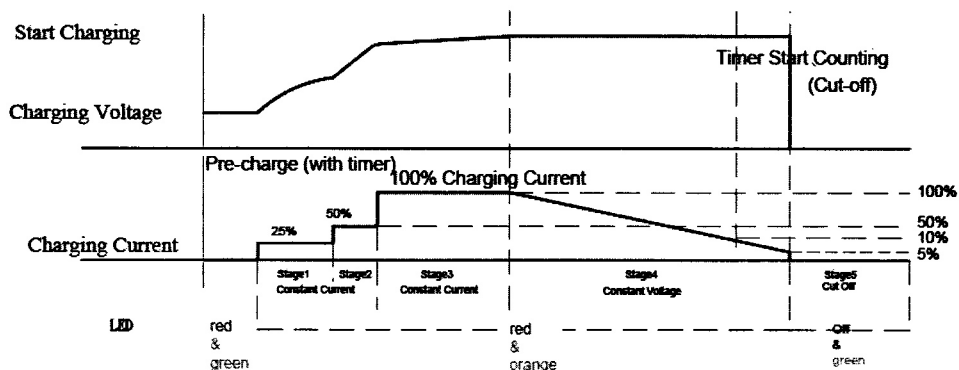

Digital Meter Indications:

